


UV Lamp Weathering Chamber




Mobile phone scan
More product information

Energy Conservation

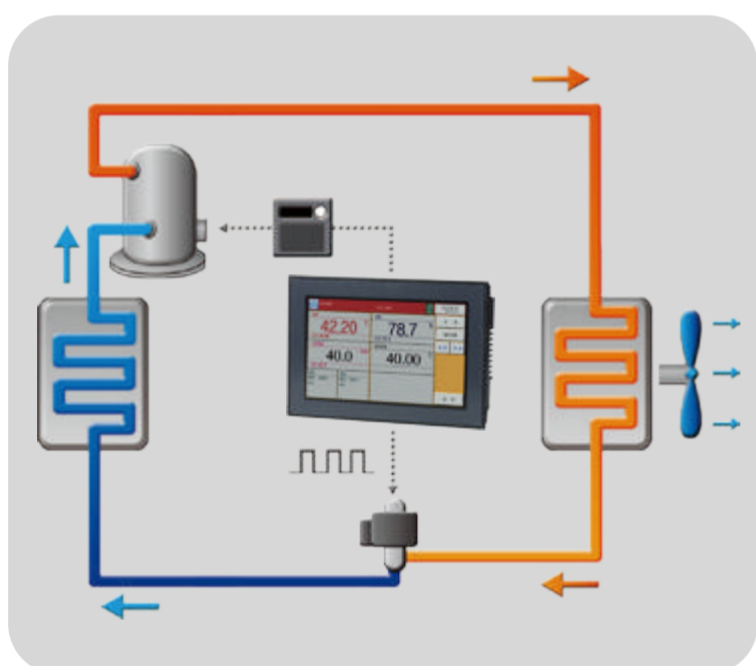

Remote network system

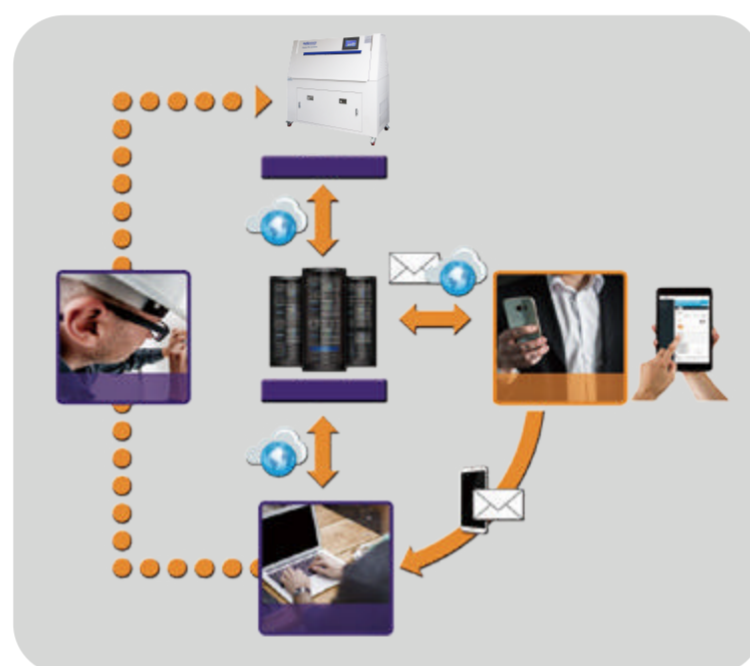

Circuit System



● Specifications

	Model	SM-UV600-C	SM-UV800-C	SM-UV2000-C
Temperature	Temperature control range	30.0℃ ~ 70.0℃		
	Temperature fluctuation	±1.0℃		
	Temperature uniformity	±2.0℃		
Humidity	Humidity control range	90.0%RH~98.0%RH(Temperature range: 30.0℃ ~ 70.0℃)		
	Humidity fluctuation	±1.0% RH		
	Humidity uniformity	±3.0%RH		
Lighting	Lamp type	UV-A、UV-B		
	Wavelength	UV-A (315~400nm) 40±10%W/m ² 、UV-B: (280~315nm) 40±10%W/m ²		
	Lamp quantity	8Pcs		16Pcs
	Distance between tubes center	70±2mm		
	Distance between tubes center and testing samples	50±2mm		
	Lamp lifespan	1200H		
	Nozzle quantity	12Pcs		16Pcs
Material / Components	Sample size	W450*H260±2mm	W100*D600±2mm	W2000*D1000±2mm
	Internal material	Stainless steel(SUS304)		
	External material	Stainless steel(SUS304)		
	Heat insulating material	50mm thickness mineral wool		
	Fan	Axial flow fan		
Size	Humidifier	Steam humidifier		
	Inner size(mm) W*H*D	1170*500*450	1170*500*600	2000*500*1000
	Outer size(mm) W*H*D	1300*1550*650	1300*1750*750	2300*1250*1250
Operating ambient temperature		+5 ~ 35℃		
Power supply		220V AC 50/60Hz	220V AC 50/60Hz	380V AC 50/60Hz
Controller		South korea SAMWONTECH TEMI880 5.7 inch controller, equipped with RS232 port		

Sanwood (HK) Industrial Corporation.,limited
Guangdong Sanwood Technology Corporation.,limited

ADD: No.88, Songchang Road, Songbotang, Changping, Dongguan, Guangdong

TEL: +86+769-81182799

FAX: +86+769-82987199

E-mail: info@sanwood.cc

www.sanwood.cc
www.climatic-chambers.com



Mobile phone scan
can visit our official website